



**Front View**

24 x 3.5" hot swap drive bays




### Features

- Ruggedized design (Internal board to board connection)
- Tool-less design
- Hot-swap expander modules, drives, PSU, fans
- Short-depth
- Clear front panel LED indicators
- Optimized thermal solution
- BMC onboard

**Rear View**

4 x 60x56mm hot swap fans

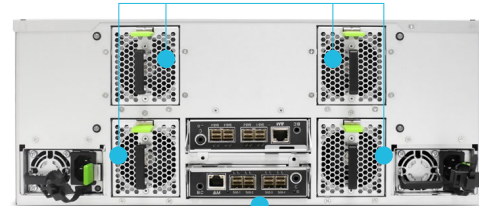

4 x Mini SAS HD per expander module

### Specifications

<b>General</b>	Number of Expander	Single/Dual
	Expander Chip	LSI SAS35x40
	Host/Expansion Interface	4 x Mini SAS HD (SFF-8644) per expander module
<b>Drives Supported</b>	Drive Interface	<ul style="list-style-type: none"> <li>• 12Gb &amp; 6Gb SAS if using dual expanders</li> <li>• 12Gb &amp; 6Gb SAS/SATA if using single expander</li> </ul>
	Form Factor	3.5"
<b>Administration / Management</b>	Admin/Firmware Upgrade	<ul style="list-style-type: none"> <li>• In-band &amp; Serial port interface</li> <li>• IEM port</li> </ul>
	LED indicators, Audible Alarm	Yes
<b>Hot swap and Redundancy</b>	Drive Bays	24
	Cooling	4 x 60x56mm hot swap fans
	Power Supply (options)	<ul style="list-style-type: none"> <li>• 550W 1+1 hot swap redundant 80+ Platinum</li> <li>• 800W 1+1 hot swap redundant 80+ Titanium</li> </ul>

<b>Hot swap and Redundancy</b>	Power Entry	Dual AC Inlet
	Expander Modules	Dual expanders (Optional)
<b>Electrical and Environmental</b>	Universal A/C Input	<ul style="list-style-type: none"> <li>• 100~127V~, 50/60Hz, 7.0A</li> <li>• 200~240V~, 50/60Hz, 3.5A</li> </ul>
	Operating Environment	<ul style="list-style-type: none"> <li>• Temperature : 0°C to 35°C</li> <li>• Relative humidity : 20% to 80%</li> </ul>
	Non-operating Environment	<ul style="list-style-type: none"> <li>• Temperature : -20°C to 60°C</li> <li>• Relative humidity : 10% to 90%</li> </ul>
<b>Physical Specification</b>	Dimensions (W x D x H)	mm : 438 x 385.5 x 174.4 inches : 17.2 x 15.1 x 6.9
	Gross Weight (w/ PSU; w/o Rail & Disks)	kgs : 25.93 lbs : 57.17
	Packaging Dimensions (W x D x H)	mm : 605 x 680 x 446 inches : 23.8 x 26.8 x 17.6
<b>Mounting</b>	Standard	20" tool-less rail

### Ordering Information

SKU Number	Description
XJ1-40244-01	4U 24x 3.5" hot-swap bays, hot-swap JBOD with single SAS 12G expander controller, single BMC, tool-less HDD tray, 550W 1+1 hot-swap redundant 80+ Platinum, tool-less rail kit (35X series)
XJ1-40244-02	4U 24x 3.5" hot-swap bays, hot-swap JBOD with dual SAS 12G expander controller, dual BMC, tool-less HDD tray, 550W 1+1 hot-swap redundant 80+ Platinum, tool-less rail kit (35X series)
XJ1-40244-03	4U 24x 3.5" hot-swap bays, , hot-swap JBOD with single SAS 12G expander controller, single BMC, tool-less HDD tray, 550W 1+1 hot-swap redundant 80+ Platinum, adjustable plate (35X series)
XJ1-40244-04	4U 24x 3.5" hot-swap bays, , hot-swap JBOD with dual SAS 12G expander controller, dual BMC, tool-less HDD tray, 550W 1+1 hot-swap redundant 80+ Platinum, adjustable plate (35X series)
XJ1-40244-05	4U 24x 3.5" hot-swap bays, hot-swap JBOD with single SAS 12G expander controller, single BMC, tool-less HDD tray, 800W 1+1 hot-swap redundant 80+ Titanium, tool-less rail kit (35X series)
XJ1-40244-06	4U 24x 3.5" hot-swap bays, hot-swap JBOD with dual SAS 12G expander controller, dual BMC, tool-less HDD tray, 800W 1+1 hot-swap redundant 80+ Titanium, tool-less rail kit (35X series)

